


GPIO default input Hi-z



General Purpose Input: 4x Opto-isolated 24V, delay time within 1ms. (sinking input, PNP)
 General Purpose Output: 4x Opto-isolated 24V, delay time within 1ms.
 GPIO current: 100 mA. (max. 0.8 A per bank of 8).

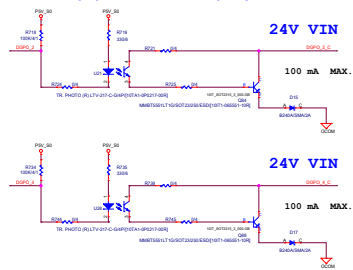